What areas does Novair service?

Although Novair is a Canadian company
specializing in supplying heat pumps to
all Canadian Provinces and Territories,
they offer heat pumps to many American States.

Does Novair stock parts locally?

Yes, spare parts are stocked at locations
across Canada. They strive to have spare parts
available within 2 business days.

Is there local technical support?

After purchase, service is where Novair stands
well above the competition. Not only do they have
local technical support, they are also standing by to help.
Always contact your installing contractor and
they will handle everything.

Novair HVAC Supply New England LLC

34 NH-125, Unit 15

Kingston, NH 03848


Novair Northern Series



10 Year Warranty

Operates as low as -26°C

SAVE up to 60% on Heating Costs

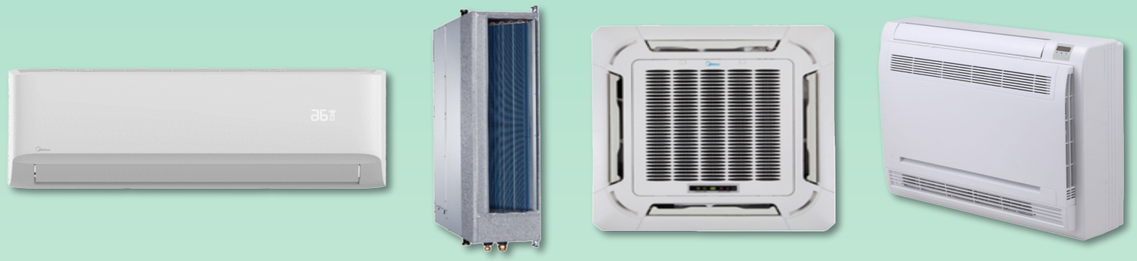

Designed for Canadian Climate

5000-hour salt spray test during development
Continues to heat even at -26°C
Heating belt on compressor
Base pan heater - vital for
cold weather operations

Key Features

Auto Restart
Leak Detection
Wifi Ready
Gold Plated Fins
Bio Filtration
Turbo Mode
Factory Base Pan Heater

Performance & Reliability Backed By A Warranty To Match

10 YEARS WARRANTY
On Parts & Labour*

Installation is required by a licensed HVAC technician,
Terms and Conditions Apply*
Warranty requires registration, units not registered get the standard 5-year parts and no labour.

NOVAIR

Novair Northern Series

Size (BTU)	9,000	12,000	18,000	24,000
Model Number	LEA09SZ26-O	LEA12SZ26-O	LEA18SZ26-O	LEA24SZ26-O
Power Supply	208/230V,60Hz,1Ph	208/230V,60Hz,1Ph	208/230V,60Hz,1Ph	208/230V,60Hz,1Ph
Rated Cooling Capacity	3100-10900	2600-13700	3600-20000	9700-27000
Rated Heating Capacity	4200-14200	4100~14400	7600-22000	11300-32700
Performance				
SEER2/EER2	24.6/14.7	23.1/12.2	24/13.5	23.5/13
HSPF2/COP	13/3.66	11.5/3.69	11.1/3.81	10/3.08
Indoor Unit				
Airflow (T/H/M/L/Si) cfm	382.6/294.3/ 194.2/153.0/N/A	382.6/294.3/ 194.2/153.0/N/A	759.3/500.3/ 441.4/370.8/N/A	759.3/588.6/ 459.1/382.6/N/A
Sound Pressure Level (T/H/M/L/Si) db(a)	45.5/42/36/21/19.5	46/43/37/20/19	54/45/40/26/20	54/48.5/43.5/ 27.5/20.5
Unit Dimensions (in)	31.57 x 7.87 x 11.61	31.57 x 7.87 x 11.61	42.60 x 9.21 x 13.27	42.60 x 9.21 x 13.27
Net/Gross Weight (lbs)	18.96/24.25	18.96/24.25	30.42/39.68	30.86/40.56
Outdoor Unit				
Compressor Type	Rotary	Rotary	Rotary	Rotary
Sound Pressure Level db(a)	52.5	54	59	60
Max Airflow (cfm)	1235.3	1235.3	1764.7	2235.3
Unit Dimensions (in)	30.12 x 11.93 x 21.85	30.12 x 11.93 x 21.85	35.04 x 13.46 x 26.50	37.24 x 16.14 x 31.89
Net/Gross Weight (lbs)	62.17/67.68	62.17/67.68	92.59/100.31	122.13/132.28
Refrigerant	R454B	R454B	R454B	R454B
Line Set Size	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"
Max Line Run (ft)	82	82	98.4	164
Max Elevation (ft)	49.2	49.2	65.6	82
Minimum Ampacity (A)	12	12	18	24
MOCP (A)	15	15	20	25
Energy Star	✓	✓	✓	✓
Commuication Wire Size	14/4 AWG	14/4 AWG	14/4 AWG	14/4 AWG

ENERGY STAR
ENERGY STAR COLD CLIMATE
AHRI CERTIFIED® www.ahridirectory.org Air-Cooling and Air-Heating Coils AHRI Standard 410
HRAI YOUR ENVIRONMENT OUR EXPERTISE MEMBER COMPANY
INTERTEK ETL C LISTED US

NovairHvacSupply.com